




**MKM KABEL**

PT Mega Kharisma Makmur

## Copper Conductor, PVC Insulated, Copper Tape Screen, PVC Sheathed Cu/PVC/CTS/PVC 0.6/1 kV (NYSY)

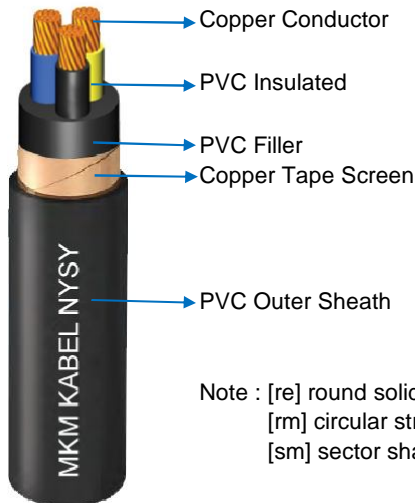

### # Application

For power plants and switchgear as well as for installation of sub-station; for installation indoors in confined spaces and cable channels because of small bending radius. As buried cable, because of its light weight preferred in where installation is difficult.

### # Specification

IEC 60502 - 1

### # Classification

Power Cable, Low Voltage 0.6/1 kV

Note : [re] round solid conductor  
[rm] circular stranded conductor  
[sm] sector shaped stranded

### Technical Properties

Number of Cores	Size	Shape of Conductor	Nominal Thickness			Approximately		DC resistance at 20 °C	Current Carrying Capacity at 30 °C in air	Short Circuit Current Capacity at 1 sec	Standard Length
			Insulation	Copper Tape	Outer sheath	Overall diameter	Net Weight				
	mm <sup>2</sup>	shape	mm	mm	mm	mm	Kg/Km	Ω/km	A	kA	m
3 CORES	1.5	re	0.8	0.1	1.8	13	275	12.1	18	0.17	1000
	2.5	re	0.8	0.1	1.8	14	338	7.41	25	0.29	1000
	4	re	1.0	0.1	1.8	16	423	4.61	34	0.46	1000
	6	re	1.0	0.1	1.8	17	509	3.08	43	0.69	1000
	10	rm	1.0	0.1	1.8	20	729	1.83	59	1.15	1000
	16	rm	1.0	0.1	1.8	22	980	1.15	79	1.84	1000
	25	rm	1.2	0.1	1.8	26	1,405	0.727	104	2.88	1000
	35	rm	1.2	0.1	1.8	28	1,777	0.524	129	4.03	1000
	50	sm	1.4	0.1	1.8	28	1,918	0.387	158	5.75	1000
	70	sm	1.4	0.1	1.9	32	2,620	0.268	198	8.05	1000
	95	sm	1.6	0.1	2.1	36	3,520	0.193	242	10.93	1000
	120	sm	1.6	0.1	2.2	39	4,280	0.153	282	13.80	500
	150	sm	1.8	0.1	2.3	43	5,259	0.124	322	17.25	500
	185	sm	2.0	0.1	2.5	47	6,478	0.0991	366	21.28	500
240	sm	2.2	0.1	2.7	53	8,398	0.0754	431	27.60	500	